




SPD CB

Fully electric stacker with cradle for roll handling

Catalog | Data sheet

SPD CB is a **fully electric stacker** equipped with a **fixed cradle** for picking up and storing rolls weighing **up to 1200 kg**. It can be equipped with hydraulic tilting lip, available as option, for improving safety during the transportation of the roll. Thanks to its shaped cradle, **SPD CB** is the **ideal partner** for winding and unwinding **machinery feeding**.

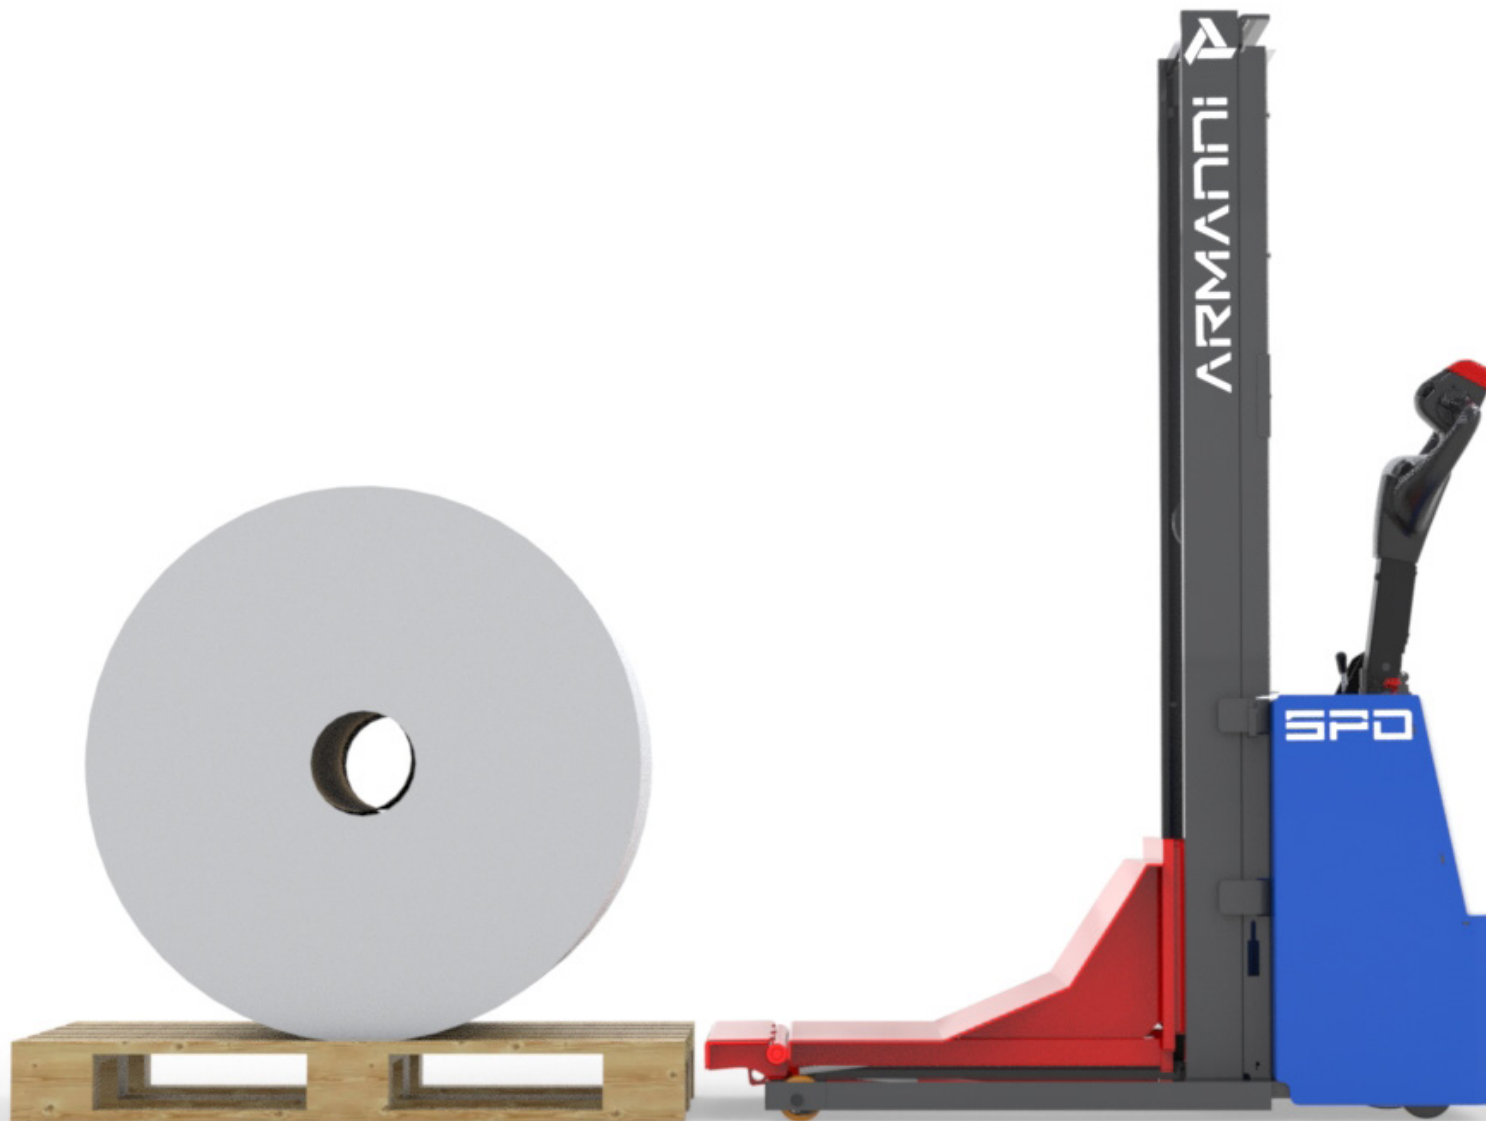


Main application:

- Winding and unwinding machinery feeding. It can easily take the roll from the machinery and place it on a pallet and vice versa.

Key features



Dimensions

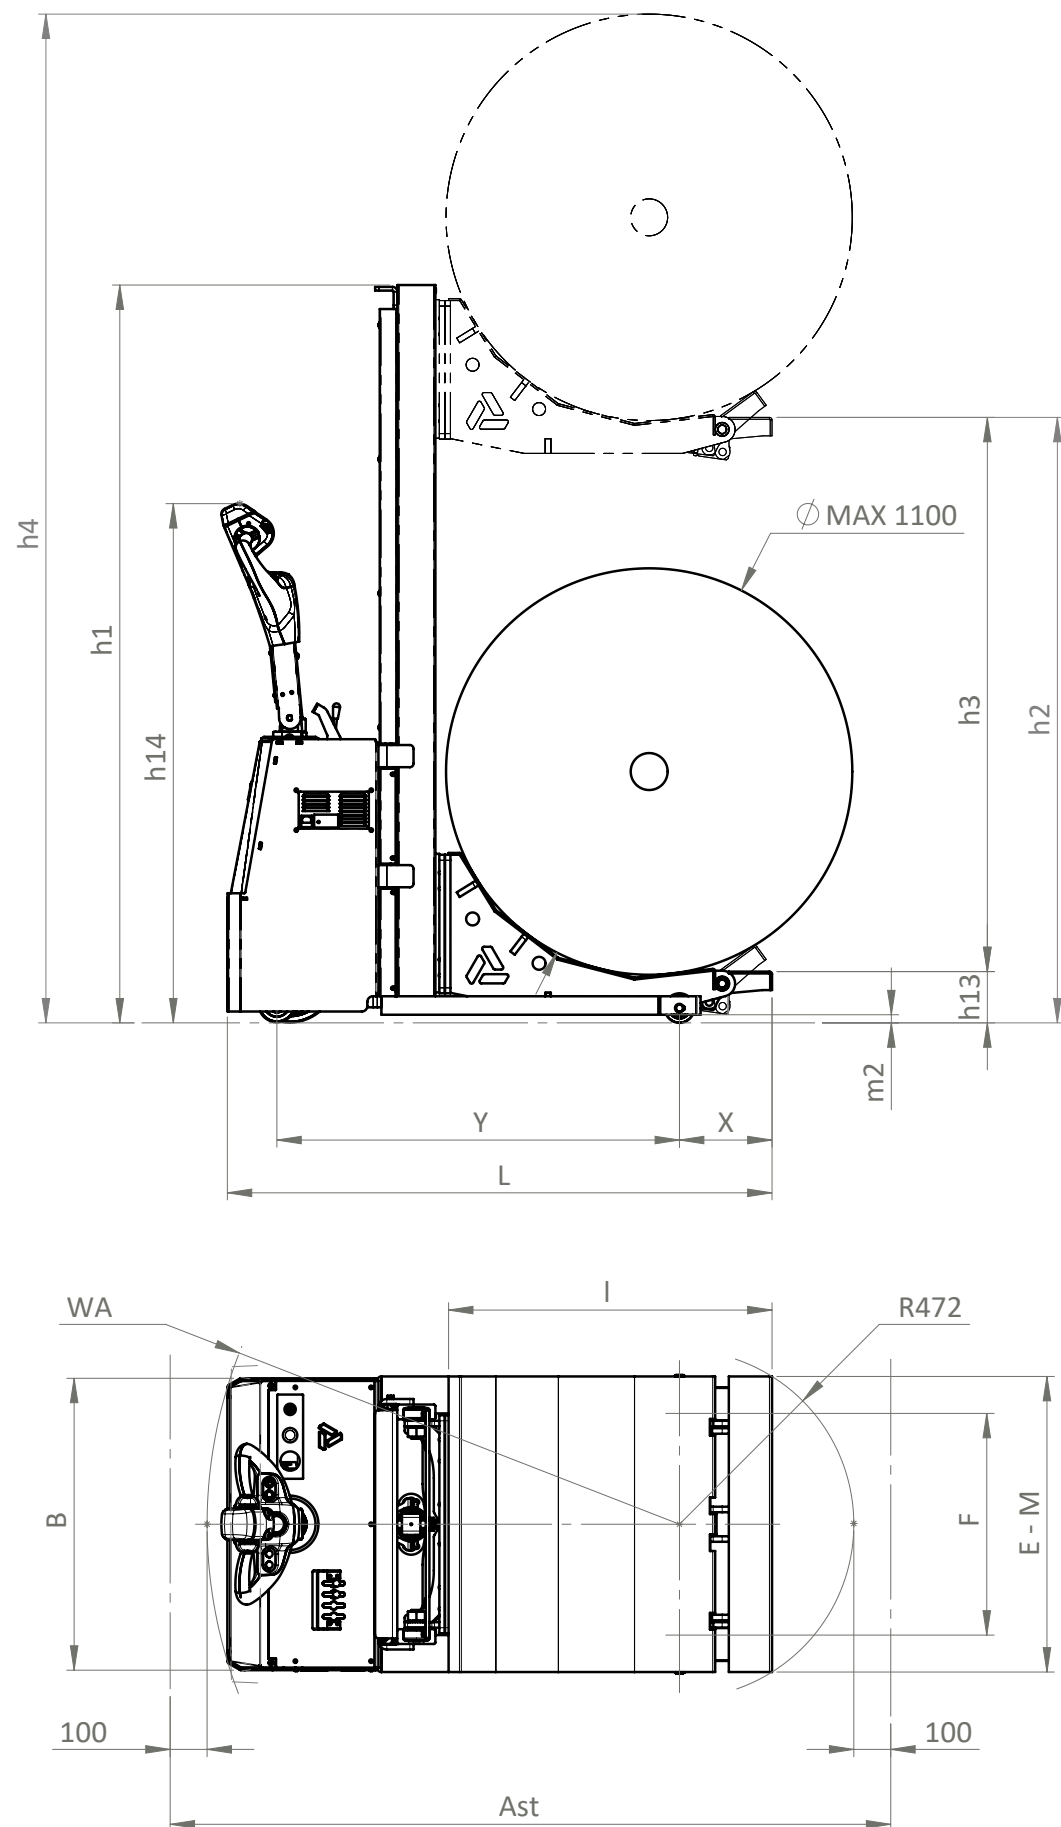

Data sheet

Key data			
Manufacturer			Armanni Carrelli Elevatori S.r.l.
Model			SPD CB
Lifting technology			electro-hydraulic
Traction technology			electric
Capacity (Kg)			1200
Weight with no battery (Kg)			750
Code			45414
Overall dimension			
Overall width (legs)	E	mm	800
Legs inner distance	F	mm	600
Overall width (cradle)	M	mm	800
Overall width	B	mm	800
Overall length	L	mm	1475
Overall cradle length	I	mm	876
Cradle overhang from the front axis	X	mm	250
Overall height (with no load)	h1	mm	1997
Max. lifting height (opened tilting lip)	h2	mm	1600
Lifting stroke	h3	mm	1460
Overall height (with load)	h4	mm	2690
Min. lifting height (opened tilting lip)	h13	mm	140
Tiller heigth (in parking position)	h14	mm	1405
Legs ground clearance	m2	mm	22
Wheelbase	Y	mm	1090
Aisle width (compliant with VDI 2198)	Ast	mm	1951
Turning radius	WA	mm	1279
Performance			
Travelling speed with/without load			3.5/4.0 Km/h
Lifting speed with/without load			0.13/0.19 m/sec
Lowering speed with/without load			0.12/0.14 m/sec
Maximum steepness allowed with/without load			3 % / 6 %
Brake			electronic
Wheels and Chassis			
Drive wheel / Castors / Rollers			PU / PU / PU
Number of wheels (support points)			5 (1 drive wheel, 2 side castors, 2 front rollers)
Drive wheel size			Ø250 x 76 mm
Side castors size			Ø100 x 40 mm
Front rollers size			Ø80 x 70 mm
Equipment			
Type of equipment		Fixed cradle (with tilting lip available as option)	
Max. roll diameter allowed		≤ 1100 mm	
Max. roll width allowed		≤ 1500 mm	

Armanni Carrelli Elevatori S.r.l. reserves the right to make changes to specifications and dimensions without prior notice. The data provided is subject to normal tolerances.



- Lithium battery
- Custom paint
- Proportional lifting control on tiller
- Lexan safety protection

Note


**Armanni Carrelli
Elevatori S.r.l.**

Via Serio 15,
24021 Albino (bg),
Italy


Tel.: +39 035752909
info@armanni.com
www.armanni.com



Authorized local dealer




STEALTH LINE


Made in Italy



© 2025 Armanni

This document has been carefully checked. Armanni accepts no responsibility for any errors. Armanni reserves the right to make changes to specifications and dimensions without prior notice. The data provided is subject to normal tolerances. Images are for illustrative purposes only.

www.armanni.com