



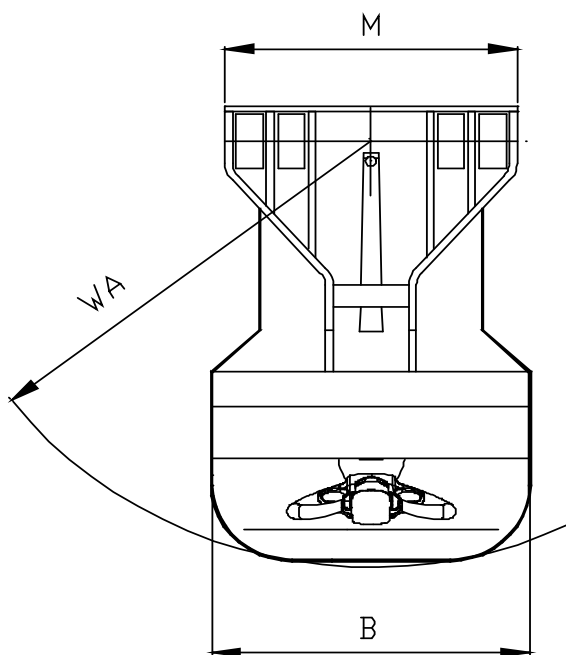


Producer	1	Armanni Carrelli Elevatori Srl			
Model	2	TPT AC-evo 40	TPT AC-evo 50	TPT AC-evo 60	
Drive	3	electric	electric	electric	
Operator Type	4	pedestrian	pedestrian	pedestrian	
Tow Capacity	5	Kg	4000	5000	6000
Load Capacity	6	Kg	2000	2500	3000
Weight (battery excluded)	7	Kg	390	410	410

	TPT AC-evo			40	50	60
BASIC DIMENSIONS	Diameter of the hook	Ø	mm	51	51	51
	Rear lenght	I	mm	875	875	875
	Rear widht	M	mm	580	580	580
	Overall width	B	mm	750	750	750
	Overall lenght	L	mm	1445	1445	1445
	Front length	L2	mm	570	570	570
	Distance from rear half axle	X	mm	130	130	130
		X2	mm	210	210	210
	Height	h1	mm	1440	1440	1440
	Lift	h3	mm	355	355	355
	Height of tiller in drive position (min/max)	h14	mm	1440/910	1440/910	1440/910
	Height, lowered	h13	mm	150	150	150
	Load distance	C	mm	700	700	700
	Turning radius	WA	mm	1350	1350	1350
PERFORMANCES	Travel speed, with/without load		Km/h	n.d.	n.d.	n.d.
	Max. gradeability, with/without load		%	n.d.	n.d.	n.d.
	Service brake			electric	electric	electric
WHEELS, CHASSIS	Drive/rear wheel			polyurethane/polyurethane	polyurethane/polyurethane	polyurethane/polyurethane
	Wheels, n° front/rear (x=driven wheels)			1x / 4	1x / 6	1x / 6
	Drive Wheel size		mm	Ø240x76	Ø250x101	Ø250x101
	Wheel size		mm	Ø150x50	Ø150x50	Ø150x50
	Wheelbase	Y	mm	1105	1105	1105
	Ground clearance, with load, below mast		mm	40	40	40
ELECTRIC MOTOR	Drive motor		KW	1.2	1.7	1.7
	Traction technology			AC technology		
	Lift motor		KW	2.2	2.2	2.2
	Battery voltage/nominal capacity (min.)		V / Ah	24 / 160	24 / 240	24 / 240
	Battery weight (min.)		Kg	151	213	213
	Battery charger voltage/nominal capacity		V / A	24 / 30	24 / 40	24 / 40
	TPT AC-evo			40	50	60

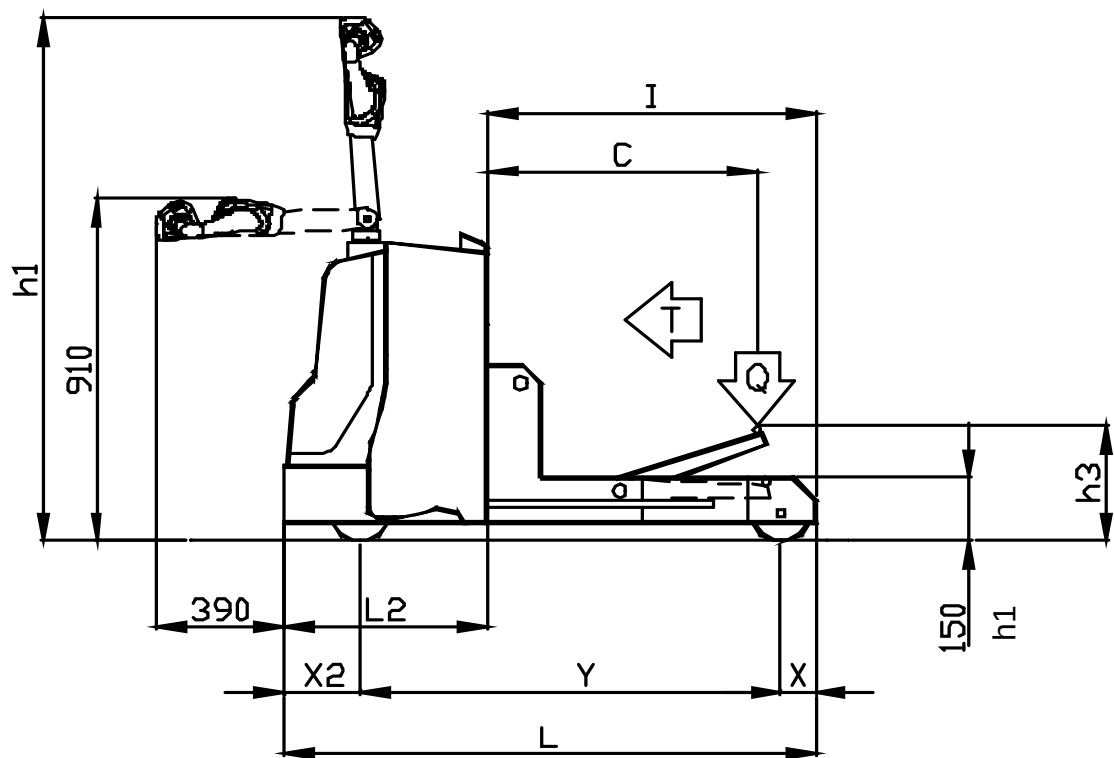

TPT AC-evo 40

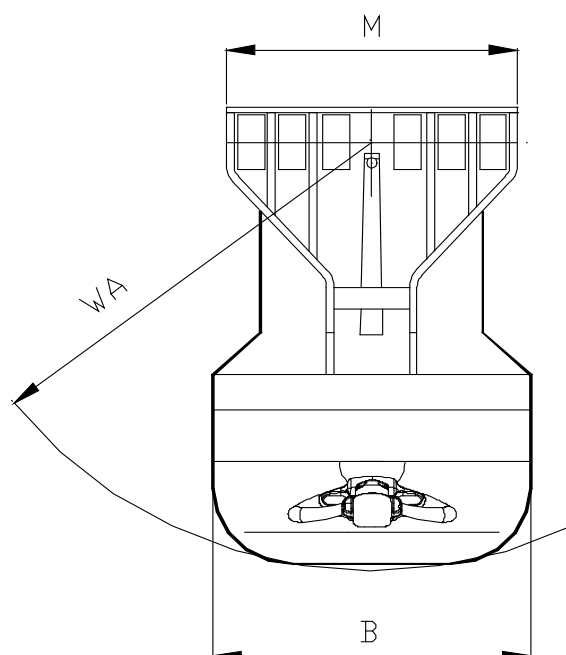

TPT AC-evo 50 / 60